

Innovation
Bactericidal joint

PERFORMER 2



▶ PROTECTION HANDRAIL

Applications

Offering both an excellent handgrip and impact resistance for corridors, this protection handrail, is ideal for all public buildings: hospitals, clinics, re-education centres, retirement homes. It is fitted with bactericidal joints.


Specification

- Description: hand and wall protection rail (Performer 2 as manufactured by Gerflor) or with a snap-fix contrast strip (Perfecta 2 as manufactured by Gerflor) comprising 3 mm thick smooth PVC profile with a depth of 140 mm achieving M1 fire-rating and solid colour. The system combines a completely smooth tubular upper part and a lower wall protection rail with decorative grooves. The PVC profile snap-fixes to a continuous aluminium section and finish is provided by smooth PVC finishing accessories with decorative grooves (wall returns, external 90°. The unit is fitted in the spacer with an adjustable aluminium clamp. Overall projection is adjustable, minimum 105 mm. No heavy metals are to be


used in its manufacture and the calcium-zinc thermal stabilisation process is to be used.

- Colour: selected by architects from manufacturer's standard range.

- Installation sequence: upper edge of section 0.90 m max. above floor level. Adjustable fixing on composite spacers to be fitted at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall return fixing with pop rivets.



Specification and technical drawings can be downloaded from our website www.gerflor.com

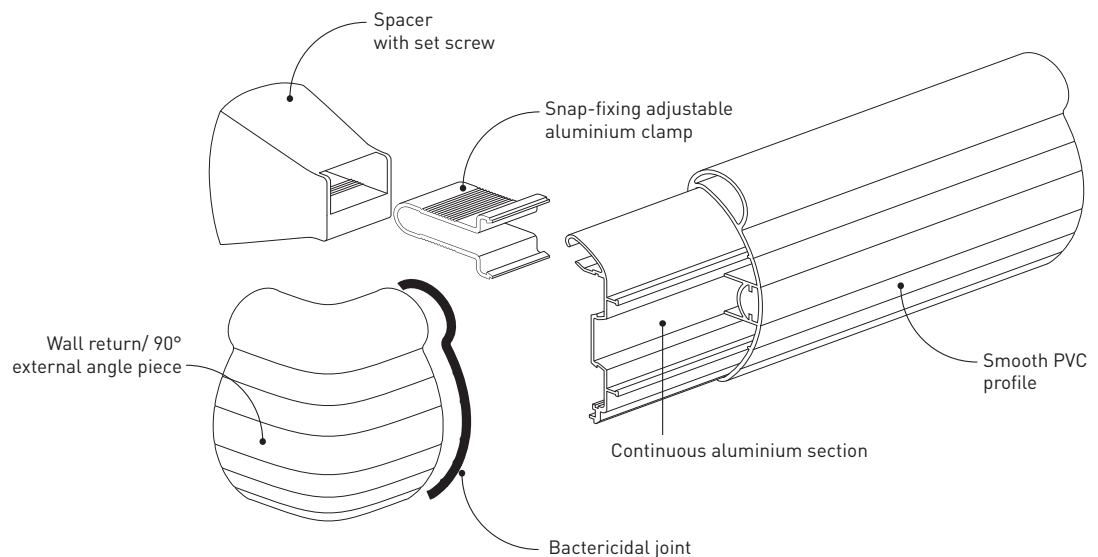

Performer 2
15 colours*




*and 15 colours on request with a minimum order quantity

Description


- Model: Performer 2 wall protection and handrail
- Section depth: 140 mm
- Length: 4 m
- Tubular upper part diameter: 40 mm
- Overall projection: minimum 105 mm adjustable
- Stand-off from wall: minimum 55 mm adjustable
- Material: 3 mm thick PVC, M1 fire-rated, solid colour

- Surface finish: smooth upper handrail, smooth wall protection rail with decorative grooves
- Fixing components: adjustable fixing on composite spacers to be fitted at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours: 15 standard



Performer 2

This version has been adapted for the UK in accordance with approved Document M to satisfy the DDA requirements

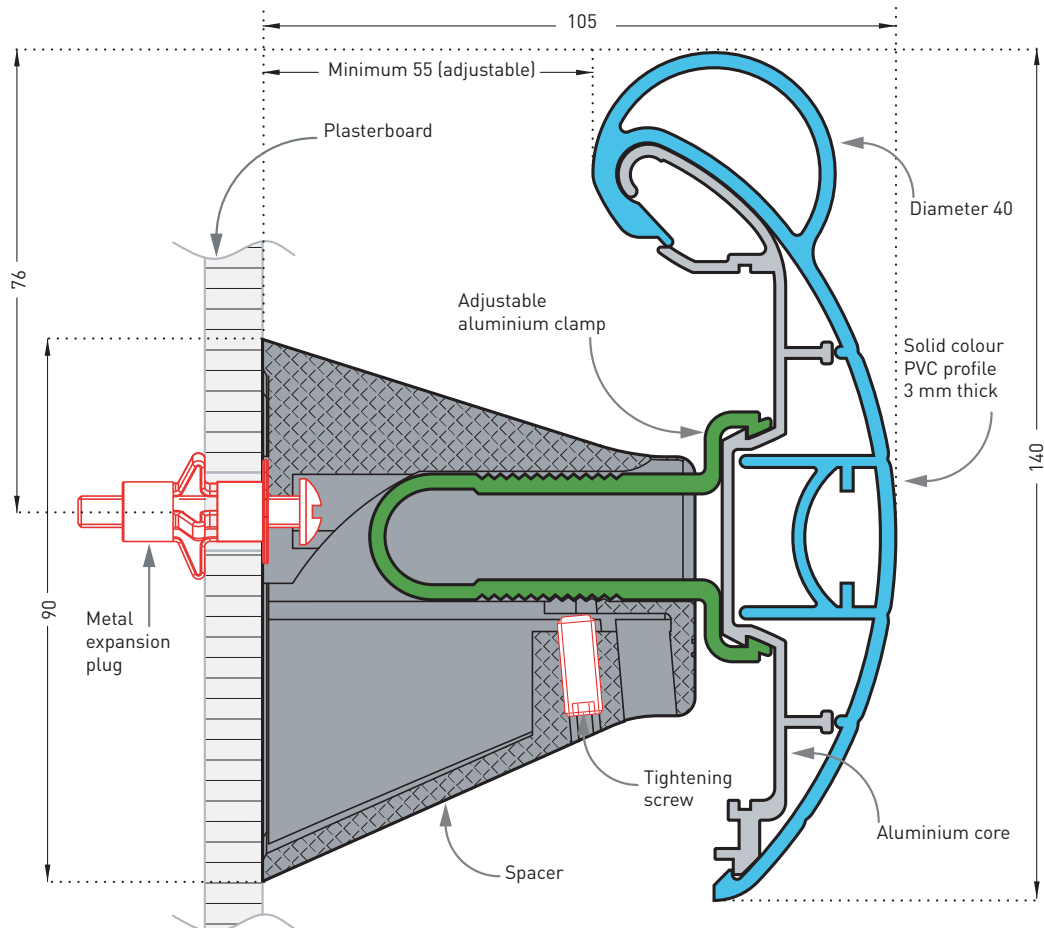

To find the colours available for each product, please see the summary table for the range at the end of this guide.