

ESCORT WITH PVC SHEATH

Bactericidal joint



▶ DIAMETER 40 MM ROUND HANDRAIL


Applications

Escort is designed to provide a high quality grip and classic look. Highly appreciated by mobility-impaired persons for its perfect roundness and pleasant feel, Escort 40 is ideal for all corridors and stairways in retirement homes, hospitals, clinics, rehabilitation centres, collective housing. Escort can be bent for curved sections. A removeable system is available to provide continuation of the handrail in front of service ducts. It is fitted with bactericidal joints.


Specification

- Description: Round handrail with antibacterial PVC sheath (Escort PVC sheathed as manufactured by Gerflor) with a diameter of 40 mm. The rail consists of an aluminium section covered by a sheath of smooth and antibacterial PVC achieving Bs2d0 fire rating with solid colour. A protective film is specified to minimise cleaning before acceptance. The section comprises a groove into which brackets, accessories and matching closers slide and lock. Perforated brackets are curved, 40 mm deep and made of satin silver anodised aluminium. Overall projection and depth are 80 mm. Accessories made of smooth antibacterial PVC (wall returns, round or flat end caps, external and internal 90° angle pieces or made-to-measure from 90° to 165°, 3-way "universal joint" rotation angle from 80° to 180° [Rapid'Angle® as manufactured by Gerflor], slope links)

- are fitted on the section and fixed with locking screws accessories. Bactericidal joints are provided for the junctions between profile sections and accessories. The profile can be curved. No heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000 and is very low (A+) according to the french regulation (23 march 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: Selected by architects from manufacturer's standard range.
- Installation sequence: Upper edge of section 0.90 m max. above floor level. Fixes to 2-point self-locking perforated aluminium brackets at 1.20 m centres (0.80 m centres in heavy traffic areas and on light partitions like plasterboard).



Specification and technical drawings can be downloaded from our website www.gerflor.com


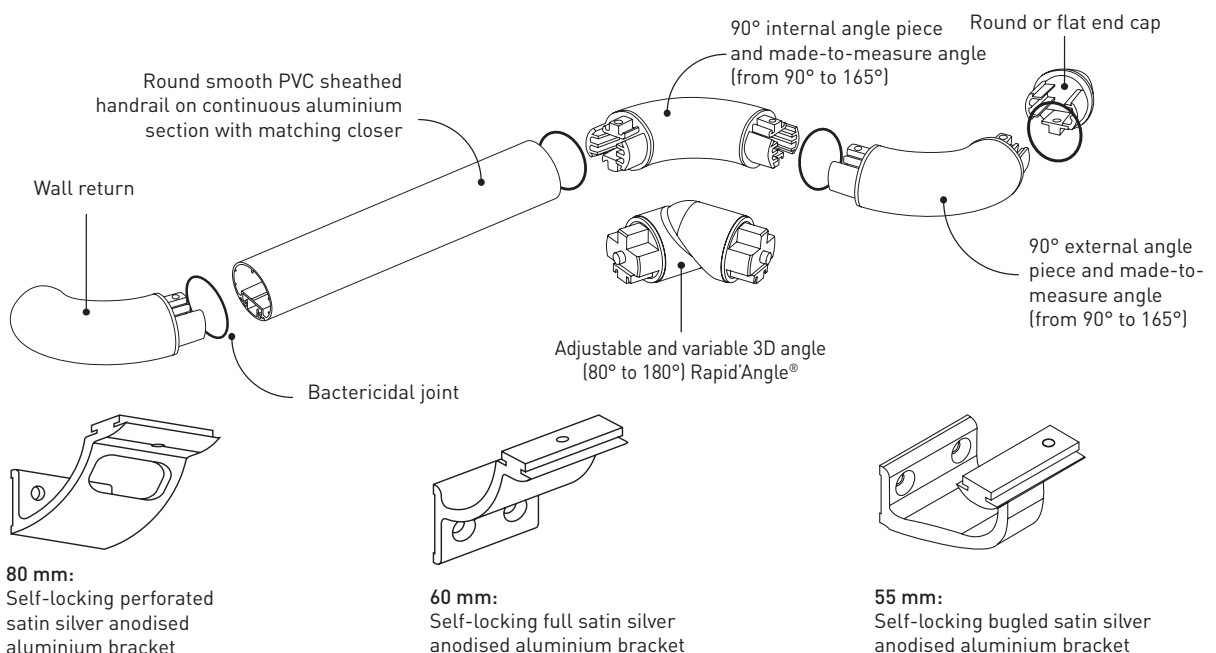


80 mm:
Self-locking perforated satin silver anodised aluminium bracket

60 mm:
Self-locking full satin silver anodised aluminium bracket


55 mm:
Self-locking bugled satin silver anodised aluminium bracket

Escort
28 colours

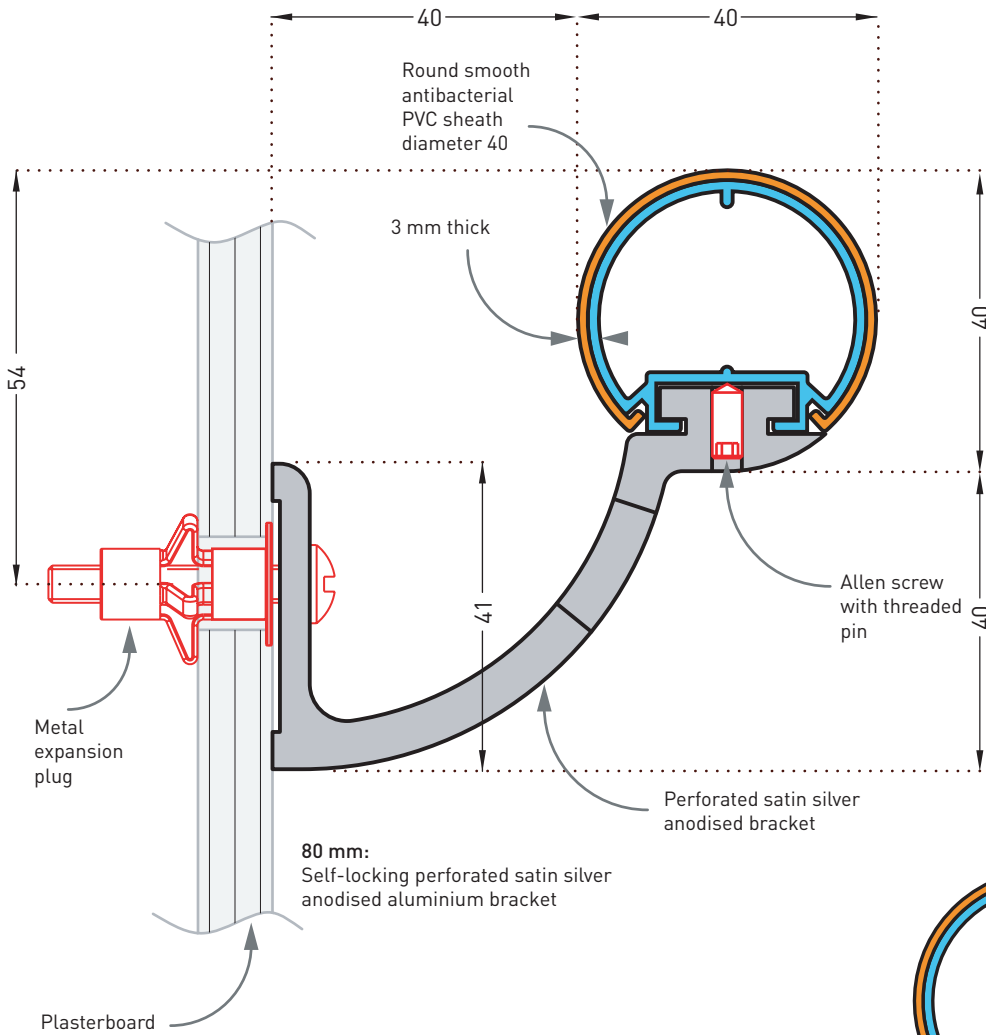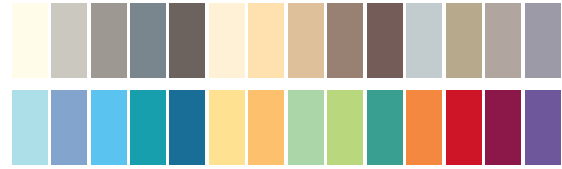


Description

- Model: Escort round PVC-sheathed handrail
- Diameter: 40 mm
- Length: 4 m
- Overall projection: 80 mm
- Stand-off from wall: 40 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour, on continuous aluminium section, bactericidal joints
- Fixing components: 2-point self-locking perforated brackets, satin silver anodised aluminium finish, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic areas and on light partitions like plasterboard)
- Colours: 28 standard

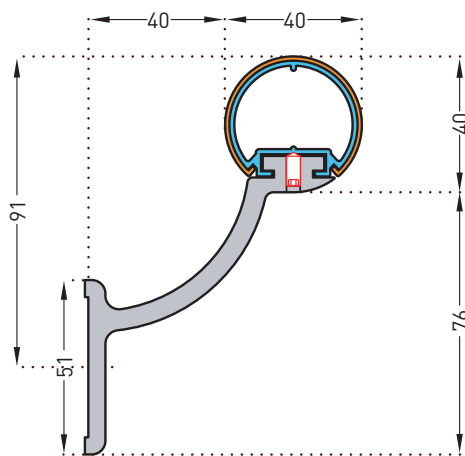

60 mm:
Self-locking full satin silver anodised aluminium bracket

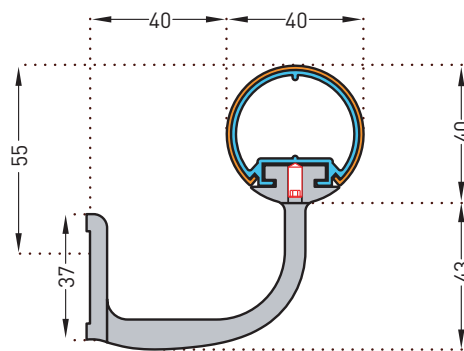

55 mm:
Self-locking bugled satin silver anodised aluminium bracket

