

TARASAFE

SAFETY FLOORING

gerflor.com




Gerflor[®]
theflooringgroup

SparClean® Surface Treatment

Gerflor's unique and patented SparClean® treatment is underpinned by over 10 years of continuous improvement & customer satisfaction

Benefits from this unique surface treatment include:

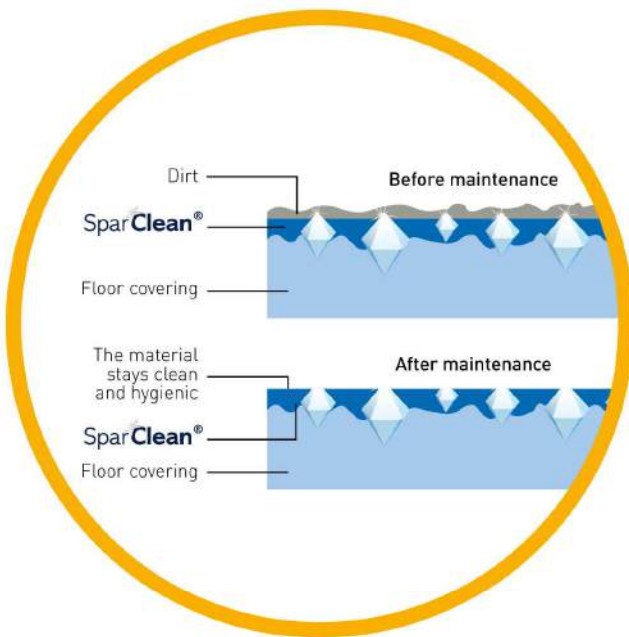

SparClean® Treated

IMPROVED STAIN RESISTANCE

- ▶ A higher and better resistance to staining (Betadine)
- ▶ The easiest Safety Flooring to maintain in today's market


ENHANCED HYGIENE

- ▶ With a generous application of SparClean® (> 0.35 µ/m²) during the manufacturing process, you can be confident that our treated products are fully coated
- ▶ No space for micro porosity or dirt holes that may be evident in products that receive an inferior level of treatment

PROVEN DURABILITY

- ▶ The most durable treatment on the market when compared with alternative products

Forecasted Payback Periods

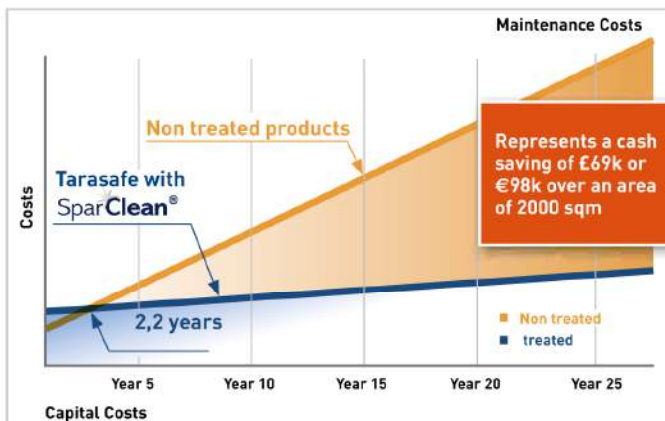

WORKING FOR YOUR ENVIRONMENT

- ▶ A drastic reduction of water and detergent usage when compared with non treated material (by up 60%)
- ▶ Independent studies prove that payback is guaranteed after 2.2 years

* providing maintenance instructions duly followed

Payback periods calculated relative to non-treated product
Source: Patrick Michael Associates whole life cycle cost consultant.


NEW
COLOURS

Tarasafe Safety Flooring

The Crystal Clear Advantage

Brighter, greener & easier to install vinyl safety flooring

- ▶ **Revolutionary new Tarasafe** has a brand new composition. With ground breaking Mineral Crystal Particles inlaid into the surface, this improves both the performance & appearance of the floor.
- ▶ An ideal and better solution to alternatives made with the carborundum particle, which traditionally make safety floors inherently darker in appearance and more difficult to recycle.
- ▶ **New Tarasafe Safety flooring** offers a number of benefits including:

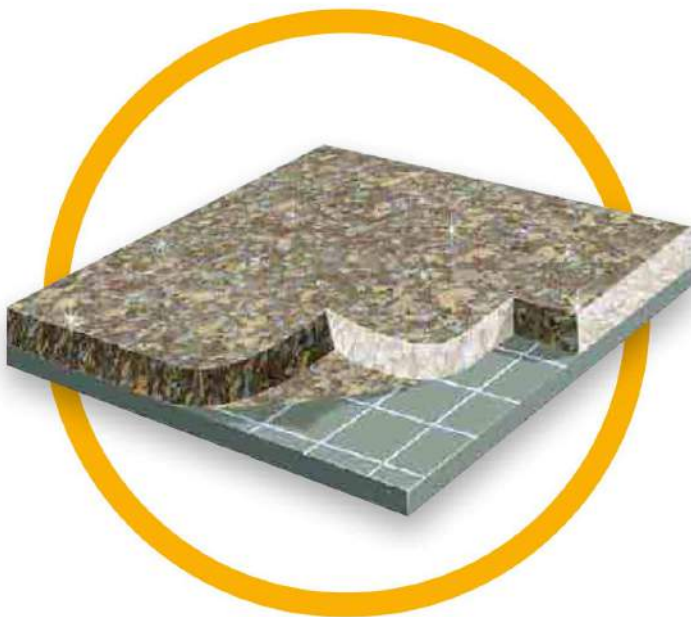

Brighter, cleaner surface that adds real sparkle



Easier to install, lighter & more flexible to handle



Easier to cut-up 5 times more blade life



100% recyclable & contains recycled materials



Reliable Anti-slip performance (*R12 – Tarasafe Super)



High resistance to heavy traffic

TARASAFE UNI & STYLE



R10



SparClean®

Meets HSE guidelines



TARASAFE UNI



7618 Edelweiss
WR: 0001




7767 Dove Grey
WR: 0336



7773 Storm
WR: 2412



7386 Savana
WR: 0386

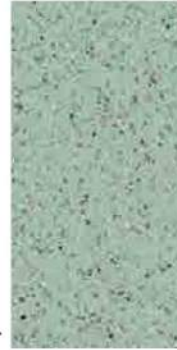

7504 Pastel Green
WR: 0579



7438 Baleine
WR: 0638



TARASAFE STYLE




4319 Almond

WR: 0301




4322 Hazelnut

WR: 2422

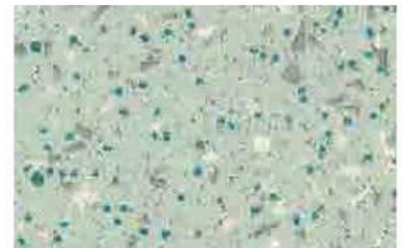


4504 Spearmint

WR: 2414

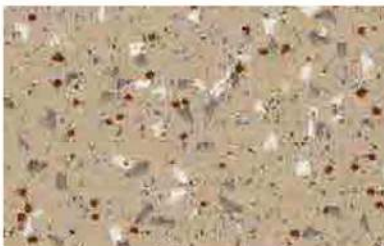


4321 Oatmeal

WR: 2413

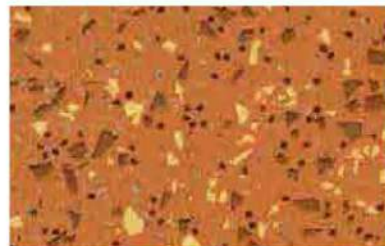


8101 Burnt Orange

WR: 2424

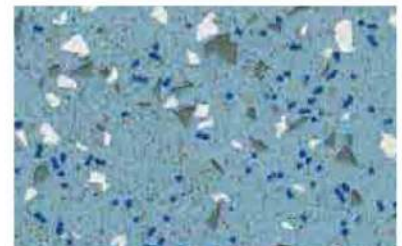

4448 Fresh Water

WR: 2431

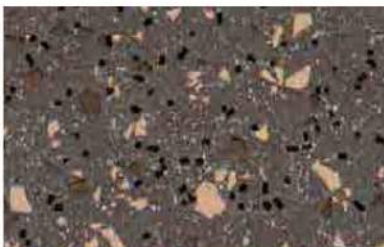


8032 Liquorice

WR: 2423




8102 Paprika

WR: 2433

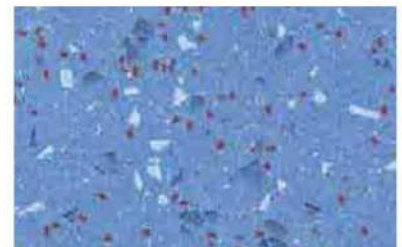


4449 Blueberry

WR: 2432

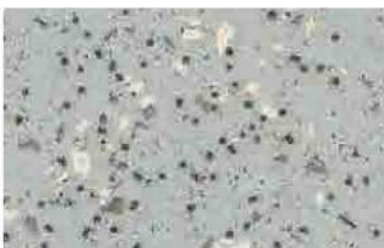

4785 Oyster

WR: 2308

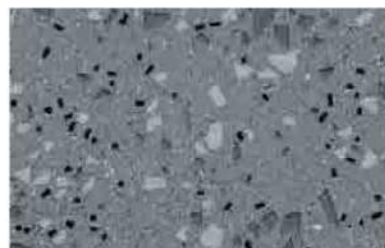

4799 Caviar

WR: 0919



Compact sheet without foam backing

WR: Welding Rods - Reference number: 0585 + [WR] code

* For more details: www.thegreenguide.org.uk

TARASAFE ULTRA

ULTRA


 2m |
  R10 |
  SparClean® |
 Meets HSE guidelines

 A+BRE
 Generic environmental
 Rating


 HSE
 36+
 SLIP RESISTANT

ULTRA COMFORT


 2m |
 R11 |
 16 dB



8701 Opal WR: 2415



7482 Halite WR: 0482




8704 Pebble WR: 0173



7383 Diopside WR: 2416




4323 Sandstone WR: 0110




4463 Aqua WR: 2417




8709 Granite WR: 2420



7384 Citrine WR: 0242




4505 Peridot WR: 2435




4465 Cobalt WR: 0190



8710 Basalt WR: 2421




8013 Jasper WR: 2419



4508 Jade WR: 2418




4472 Moonstone WR: 2319




8717 Obsidian WR: 2436



4128 Ruby WR: 2300





4460 Topaz WR: 2434



4470 Sapphire WR: 2165



 Compact sheet without foam backing
 Comfort sheet with foam backing

WR: Welding Rods - Reference number: 0585 + [WR] code

* For more details: www.thegreenguide.org.uk

TARASAFE GEO

 2m |
  R10 |
  SparClean® |
 Meets HSE guidelines


A+ BRE
 Generic Environmental Rating


HSE 36+
 SLIP RESISTANT



4784 Artic

WR: 0151



8236 Starburst

WR: 2425



4316 Salt Lake

WR: 0193



4108 Sunset

WR: 0154



4503 Rainforest

WR: 2167



4320 Tundra

WR: 0252



4106 Lava

WR: 2264



4459 Oceanic

WR: 2410



4788 Alpine

WR: 0458




4317 Delta

WR: 2232



4447 Glacier Blue

WR: 0141

 Compact sheet without foam backing

WR: Welding Rods - Reference number: 0585 + [WR] code

* For more details: www.thegreenguide.org.uk

TARASAFE ULTRA-STYLE-UNI-GEO



R10



SparClean®

Meets HSE guidelines



Tarasafe ULTRA - Opal



Tarasafe STYLE - Oyster




Tarasafe UNI - Edelweiss



Tarasafe UNI - Dove Grey


Comfort
sample



Tarasafe ULTRA - Granite




Tarasafe GEO - Artic




Tarasafe UNI - Storm




Tarasafe GEO - Alpine



Tarasafe ULTRA - Pebble



Tarasafe STYLE - Caviar



Tarasafe ULTRA - Obsidian



Tarasafe GEO - Tundra

Compact sheet without foam backing

Comfort sheet with foam backing

* For more details: www.thegreenguide.org.uk

TARASAFE ULTRA-STYLE-UNI-GEO




R10



SparClean®


Meets HSE guidelines



Tarasafe ULTRA - Diopside




Tarasafe STYLE - Almond



Tarasafe ULTRA - Citrine



Tarasafe GEO - Sunset




Tarasafe STYLE - Oatmeal



Tarasafe UNI - Savana



Tarasafe GEO - Starburst



Tarasafe STYLE - Burnt Orange



Tarasafe GEO - Salt Lake



Tarasafe ULTRA - Jasper



Tarasafe ULTRA - Sandstone



Tarasafe ULTRA - Ruby




Tarasafe ULTRA - Basalt



Tarasafe STYLE - Liquorice



Tarasafe STYLE - Hazelnut



Tarasafe STYLE - Paprika



Tarasafe GEO - Delta



Tarasafe GEO - Lava

Compact sheet without foam backing

Comfort sheet with foam backing

* For more details: www.thegreenguide.org.uk

TARASAFE ULTRA-STYLE-UNI-GEO




R10




SparClean®


Meets HSE guidelines




Tarasafe STYLE - Spearmint




Tarasafe UNI - Pastel Green




Tarasafe STYLE - Fresh water




Tarasafe ULTRA - Halite



Tarasafe ULTRA - Peridot




Tarasafe ULTRA - Aqua




Tarasafe ULTRA - Cobalt




Tarasafe GEO - Glacier Blue




Tarasafe ULTRA - Jade



Tarasafe ULTRA - Topaz



Tarasafe UNI - Baleine




Tarasafe STYLE - Blueberry




Tarasafe GEO - Rainforest



Tarasafe GEO - Oceanic



Tarasafe ULTRA - Moonstone



Tarasafe ULTRA - Sapphire



Compact sheet without foam backing

Comfort sheet with foam backing

* For more details: www.thegreenguide.org.uk

TARASAFE ELEMENTS


2 m R10 Meets HSE guidelines

A* BRE
Green: environmental
Flating*

HSE
36+
SLIP RESISTANT



7724 Calcium WR: 0694

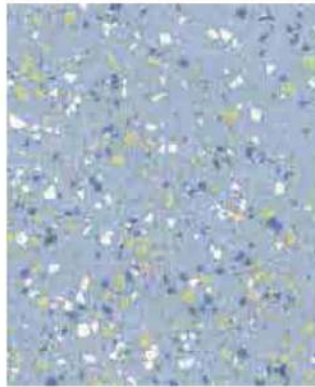


7407 Oxygen Blue WR: 2138



7725 Zinc WR: 0069



7307 Copper WR: 0001

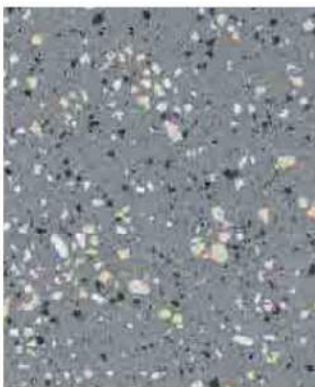

7726 Magnesium WR: 0075



7308 Earth WR: 2426



Compact sheet without foam backing

WR: Welding Rods - Reference number: 0585 + [WR] code

* For more details: www.thegreenguide.org.uk

TARASAFE STANDARD

**NEW
COLOURS**



R10



Meets HSE guidelines



7731 Marbre WR: 0304



7618 Edelweiss WR: 0001



7767 Dove Grey WR: 0336



7386 Savana WR: 0620



NEW
7508 Avocado WR: 2603



7704 Sky Blue WR: 2429



7773 Storm WR: 0033



NEW
7312 Dune WR: 2600



NEW
7115 Flame WR: 2601



7438 Baleine WR: 0638



7801 Noir WR: 2427



7302 Sahara WR: 2411



NEW
7107 Poppy WR: 2602



7709 Royal Blue WR: 0636

Compact sheet without foam backing

WR: Welding Rods - Reference number: 0585 + [WR] code

* For more details: www.thegreenguide.org.uk

TARASAFE PLUS & SUPER



TARASAFE PLUS

 R10   Meets HSE guidelines





TARASAFE SUPER

 R12 



7731 Marbre

WR: 0304



7386 Savana

WR: 0620




7767 Dove Grey

WR: 0336



7438 Baleine

WR: 0638

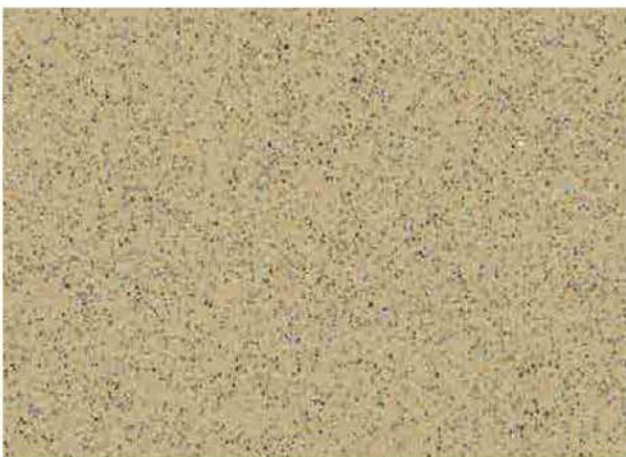

7302 Sahara

WR: 2411

TARASAFE ELEMENTS-STANDARD



R10



Meets HSE guidelines



Tarasafe ELEMENTS - Calcium



Tarasafe STANDARD - Edelweiss



Tarasafe STANDARD - Marbre



Tarasafe ELEMENTS - Copper




Tarasafe ELEMENTS - Zinc



Tarasafe STANDARD - Dove Grey




Tarasafe STANDARD - Storm

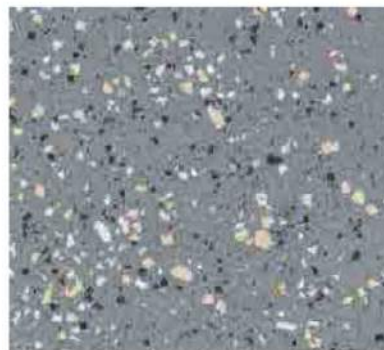

Tarasafe ELEMENTS - Magnesium



 Compact sheet without foam backing

* For more details: www.thegreenguide.org.uk

TARASAFE ELEMENTS-STANDARD

**NEW
COLOURS**



R10




Meets HSE guidelines



Tarasafe STANDARD - Savana



Tarasafe STANDARD - Avocado

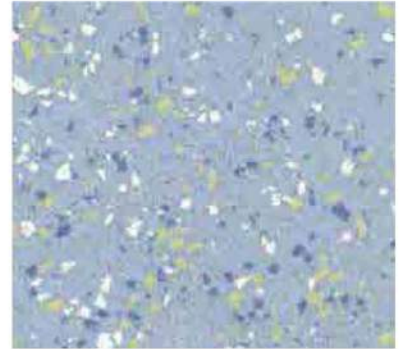

Tarasafe ELEMENTS - Oxygen Blue



Tarasafe STANDARD - Flame




Tarasafe STANDARD - Dune



Tarasafe STANDARD - Baleine



Tarasafe ELEMENTS - Earth

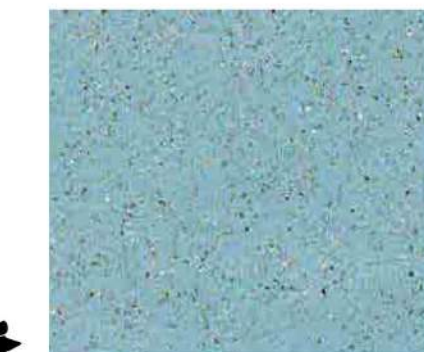

Tarasafe STANDARD - Sky Blue



Tarasafe STANDARD - Poppy



Tarasafe STANDARD - Sahara



Tarasafe STANDARD - Royal Blue



Tarasafe STANDARD - Noir

Compact sheet without foam backing

* For more details: www.thegreenguide.org.uk



Tarasafe Treated					Tarasafe Non Treated			
Uni	Geo	Style	Ultra	Ultra Comfort	Elements	Standard	Super	Plus

DESCRIPTION

Total Thickness	EN 428	mm	2			3,2	2	2.20	2.50		
Thickness of Wearlayer	EN 429	mm	0.91	1.15	1.21	1.16	1.16	1.13	0.74	1.12	1.14
Weight	EN 430	g/m ²	2600	2500	2620	2610	3080	2590	2210	2880	3090
Width/Length of Sheet	EN 426	cm/ml	200/20			200/20			200/20		

CLASSIFICATION

Norm/Product Specification	EN 649 EN 651	-	EN 649		EN 651	EN 649	EN 649
European classification	EN 685	class	34-43			34-43	34-43
K Rating	-	class	K5			K5	K5
Fire Rating	EN 13501-1	class	B _{fl} -s1			B _{fl} -s1	B _{fl} -s1
Static electrical propensity	EN 1815	kV	<2			<2	<2
Slip resistance:							
Ramp test shod with oil	DIN 51130	class	R10		R11	R10	R12 R10
Ramp test with water (Shod/Barefoot)	EN 13845, annex C	class	ESf/ESb			ESf ESf/ESb	ESf/ESb
Pendulum test (wet & dry)	BS 7976-2	PTV (degree)	>36			>36	>36
Surface roughness	-	Rz value (µm)	>20			>20	>20

PERFORMANCES

Wear Resistance	EN 660.2	mm ³	≤2.0			≤2.0	≤2.0
Wear Group	EN 651	-	T			T	T
Dimensional stability	EN 434	%	≤0.40			≤0.40	≤0.40
Residual indentation: exigency	EN 433	mm	≤0.10		≤0.20	≤0.10	≤0.10
Impact Sound Insulation	EN ISO 717-2	dB	-		16	-	-
Thermal Conductivity	EN 12 524	W/(m.K)	0.25			0.25	0.25
Colour Fastness	EN 20 105-B02	degree	≥6			≥6	≥6
Chemical Products Resistance	EN 423	-	Good			Good	Good
Bacteriostatic and fungistatic treatment	-	-	Sanosol®			Sanosol®	Sanosol®
Surface Treatment	-	-	SparClean®			-	-
TVOC after 28 days	ISO 16000-6	µg/m ³	<100 µg/m ³			<100 µg/m ³	<100 µg/m ³

CE MARKING

CE	EN 14 041	-			

* For more details: www.thegreenguide.org.uk

CI SIB	(43)	Tn8
--------	------	-----

UK reference - January 2013



ADHESIVES :

Please refer to Gerflor Technical Guide.

INSTALLATION :

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE :

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping, more intense cleaning should be carried out periodically by machine cleaning using a red pad with a mild neutral cleanser. No seals, polishes or waxes should be applied to the floorcovering as this will impair the slip resistance of the floor.

Further installation and maintenance instructions are available from Gerflor.



Rubber leaves indelible stains on vinyl flooring; do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

For further instructions and guidance, please contact your local technical department.

ASIA: Gerflor Asia

Tel: +852 9222 6355 - Fax: +852 3006 1449

e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119

e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH

Tel: +43 (0)7229/70800-0 - Fax: +43 (0)7229/70800-218

e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14

e-mail: gerflorbelgium@gerflor.com

CANADA: Gerflor International

Tel: +1 438 333 0752 - Fax: +1 438 380 5425

e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor Floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorchina@gerflor.com

FINLAND : Gerflor Oy

Tel.: +358 (0) 10 617 5150 - Fax: +358 (0) 10 617 5152

e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:

N°Azur 0 810 569 569 **N°Azur FAX 0 810 569 570**

e-mail: contactfrance@gerflor.com

GERMANY: Gerflor Mipolam GmbH

Tel: +49 (0) 22 41-25 30-0

e-mail: GerflorMipolam@Gerflor.com

Kunden-Service: kundenservice@gerflor.com

Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100

SAT Service und Anwendungstechnik: Technik@Gerflor.com

Tel: +49 (0) 22 41-25 30-555 - Fax: +49 (0) 22 41-25 30-550

IRELAND: Gerflor Ltd

Tel: +353 (0) 42 96 61431 - Fax: +353 (0) 42 96 61759

e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.

Tel +39 02 90 40 10 - Fax +39 02 90 42 74 84

e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina

Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23

e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East

Tel: +966 3 847 1779 - Fax: +966 3 847 1781

e-mail: gerflorME@gerflor.com

NETHERLANDS: Gerflor BV

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89

e-mail: gerflorNL@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33

e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44

e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao

Tel / Fax: +7 495 785-23-71

e-mail: gerflorussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80

e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85

e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd

Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

e-mail: contractuk@gerflor.com

USA: Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753

e-mail: info@gerflorusa.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPESIFIC

Création : misterBrown - Edition : Gutenberg Networks - 60276 - 05/2013

Gerflor Be CONNECTED!



www.gerflor.com



Committed to sustainable development

Gerflor
theflooringgroup